

AQUAPOINTE RANGE

Wall-Recessed Bubbler

Models: AC-M8CRY Manual Dispense, Refrigerated, Split-Level
AC-M8CRYEE Contactless Dispense, Refrigerated, Split-Level

AC-M8CRY is a modular split-level drinking fountain

AC-M8CRY delivers 60LPH of 10°C water at 21°C ambient.

This split-level drinking fountain is manually activated via the antimicrobial touch-buttons. Contactless Dispense is available with the model AC-M8CRYEE.

Complies with ANSI A117.1 and ADA. Shall comply with all relevant CE directives (LVD, EMC, RoHS). Shall comply with ANSI/NSF 61.


Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.



Model Code	AC-M8CRY
Activation	Mechanical (touch-button) Contactless (Infrared Sensor) (AC-M8CRYEE)
Filtration	Filter (optional), Built-in 100 micron strainer
Auto-Off Water Flow	No
Water Connections	Inlet: 1/2" BSP connector, Drain: 40mm Female Socket (Not trapped)
Exterior	Antimicrobial ABS Plastic, Antimicrobial copper touch points, Brushed Stainless Steel
Chassis	Heavy Duty Galvanised Steel
Dimensions	1035(H) x 1035(W) x 483(D) mm (287 recessed)
Net Weight	61 kg
Power Supply	220-240V, 50/60 Hz
Cooling Performance	60 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)
Full Load Amps	2.2A
Rated Watts	340 W
Energy System	Refrigeration is on only when in use or if water temp increases during long period of standby.
Country of Origin	Mexico
Certifications	WaterMark, ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS)
Warranty	1 Year Full, 2 Years Parts Only

Your Partner in Cool.

AQUA
COOLER

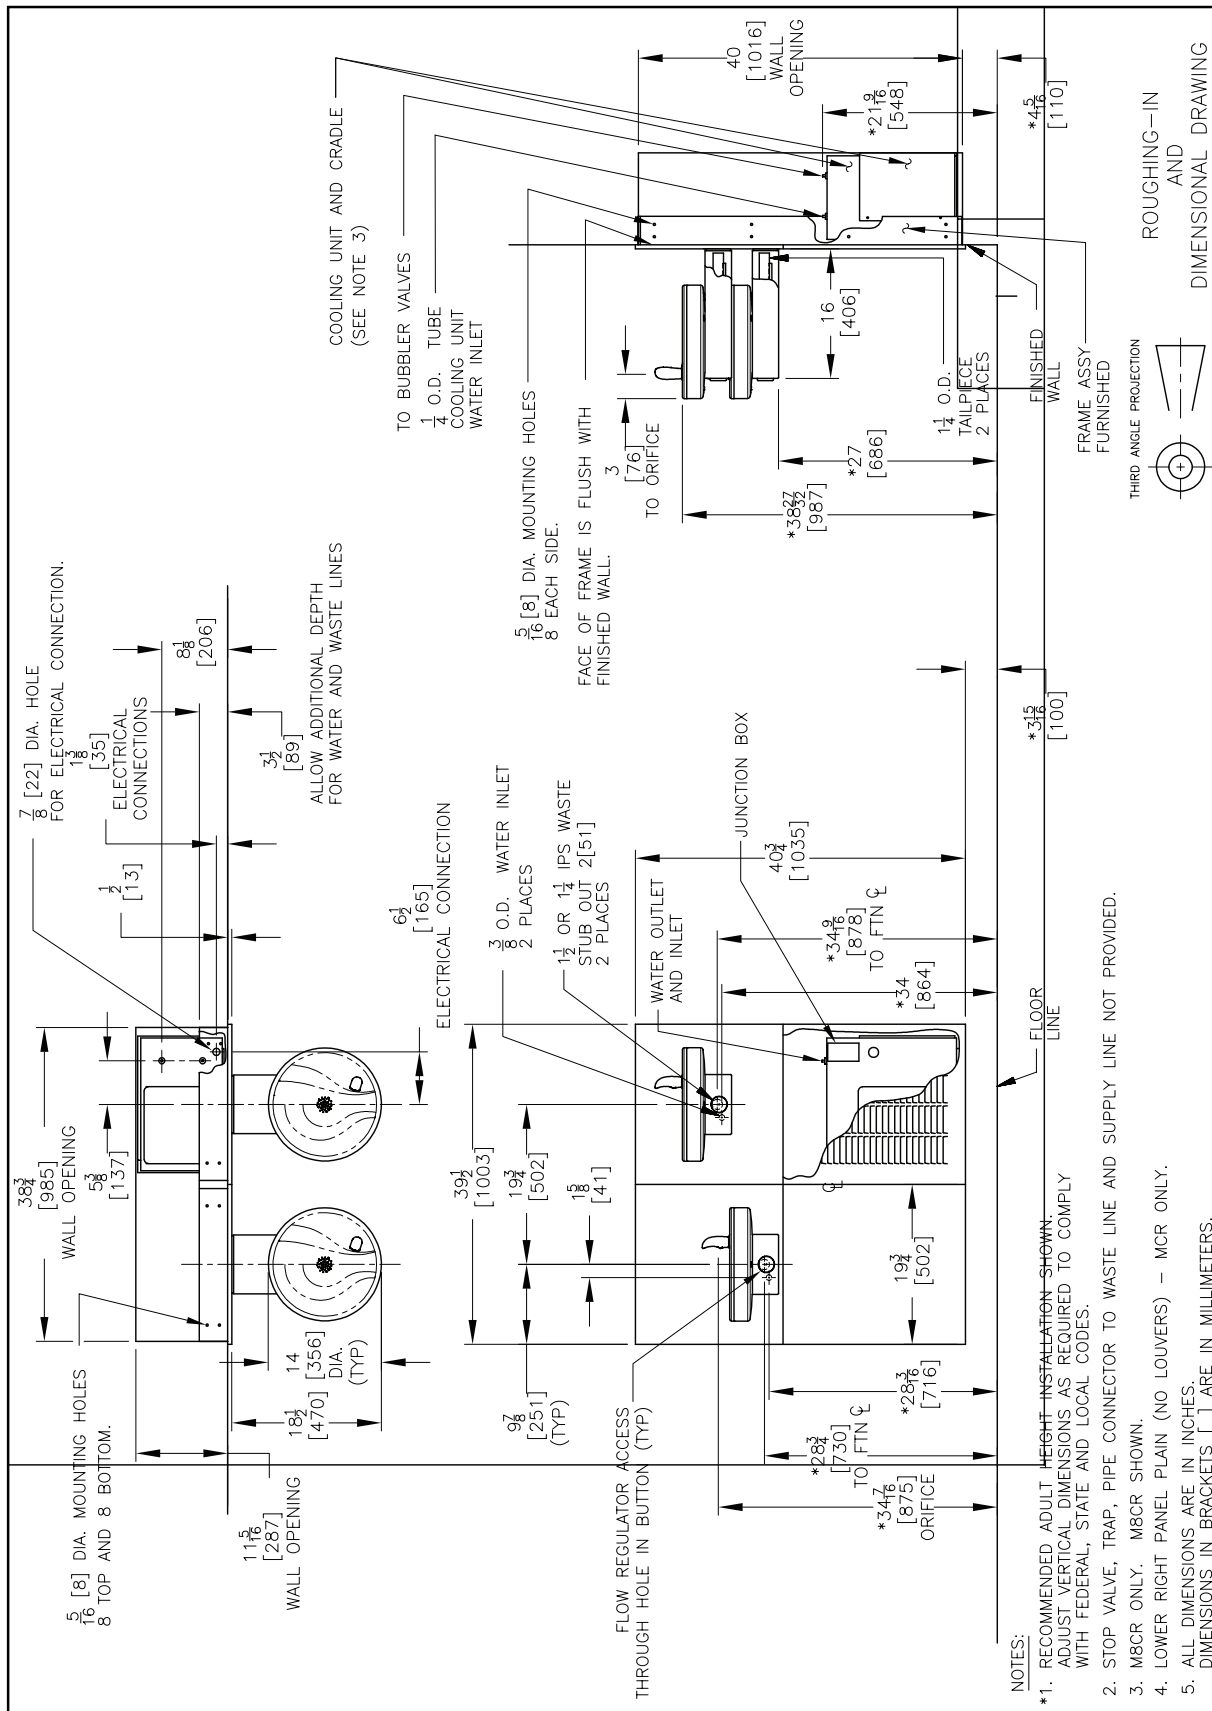

WATER INLET: DN15 MALE BSP CONNECTION. 1/2" BSP FEMALE FITTING ALSO INCLUDED.
WASTE: DN40 SOCKET OUTLET. FLEXIBLE COUPLING. NEEDS TRAP FITTED.
POWER: 3 PIN POWER CABLE PROVIDED TO BE CONNECTED TO RCD PROTECTED CIRCUIT