

VERSACOOLER RANGE

Surface-Mounted Bubblers

Models: AC-P8ACSLTTY Contactless Dispense, Refrigerated, Split-Level

Versacooler AC-P8ACSLTTY is the contactless solution to eliminate worry of cross-contamination!

Versacooler AC-P8ACSLTTY delivers 60LPH of 10°C water at 21°C ambient.

This split-level drinking fountain includes an electronic sensor underneath the nose for a contactless (touch free) activation and a 30 second shut off timer.

Key Versacooler moulded components shall contain Freshield, which utilises a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discolouration, odours and degradation.

Complies with ANSI A117.1 and ADA. Shall comply with all relevant CE directives (LVD , EMC, RoHS). Shall comply with ANSI/NSF 61.


Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.



Model Code	AC-P8ACSLTTY
Activation	Contactless (Downward facing Infrared sensor)
Filtration	Filter (optional), Built-in 100 micron strainer
Auto-Off Water Flow	Yes
Water Connections	Inlet: 1/2" BSP connector, Drain: 40mm Female Socket (Not trapped)
Exterior	Antimicrobial ABS Plastic, Brushed Stainless Steel
Chassis	Heavy Duty Galvanised Steel
Dimensions	480(H) x 448(W) x 473(D) (each)
Net Weight	38 kg
Power Supply	220-240V, 50/60 Hz
Cooling Performance	60 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)
Full Load Amps	2.2A
Rated Watts	450 W
Energy System	Refrigeration is on only when in use or if water temp increases during long period of standby.
Country of Origin	Mexico
Certifications	WaterMark, ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS)
Warranty	1 Year Full, 2 Years Parts Only

Your Partner in Cool.

**AQUA
COOLER**

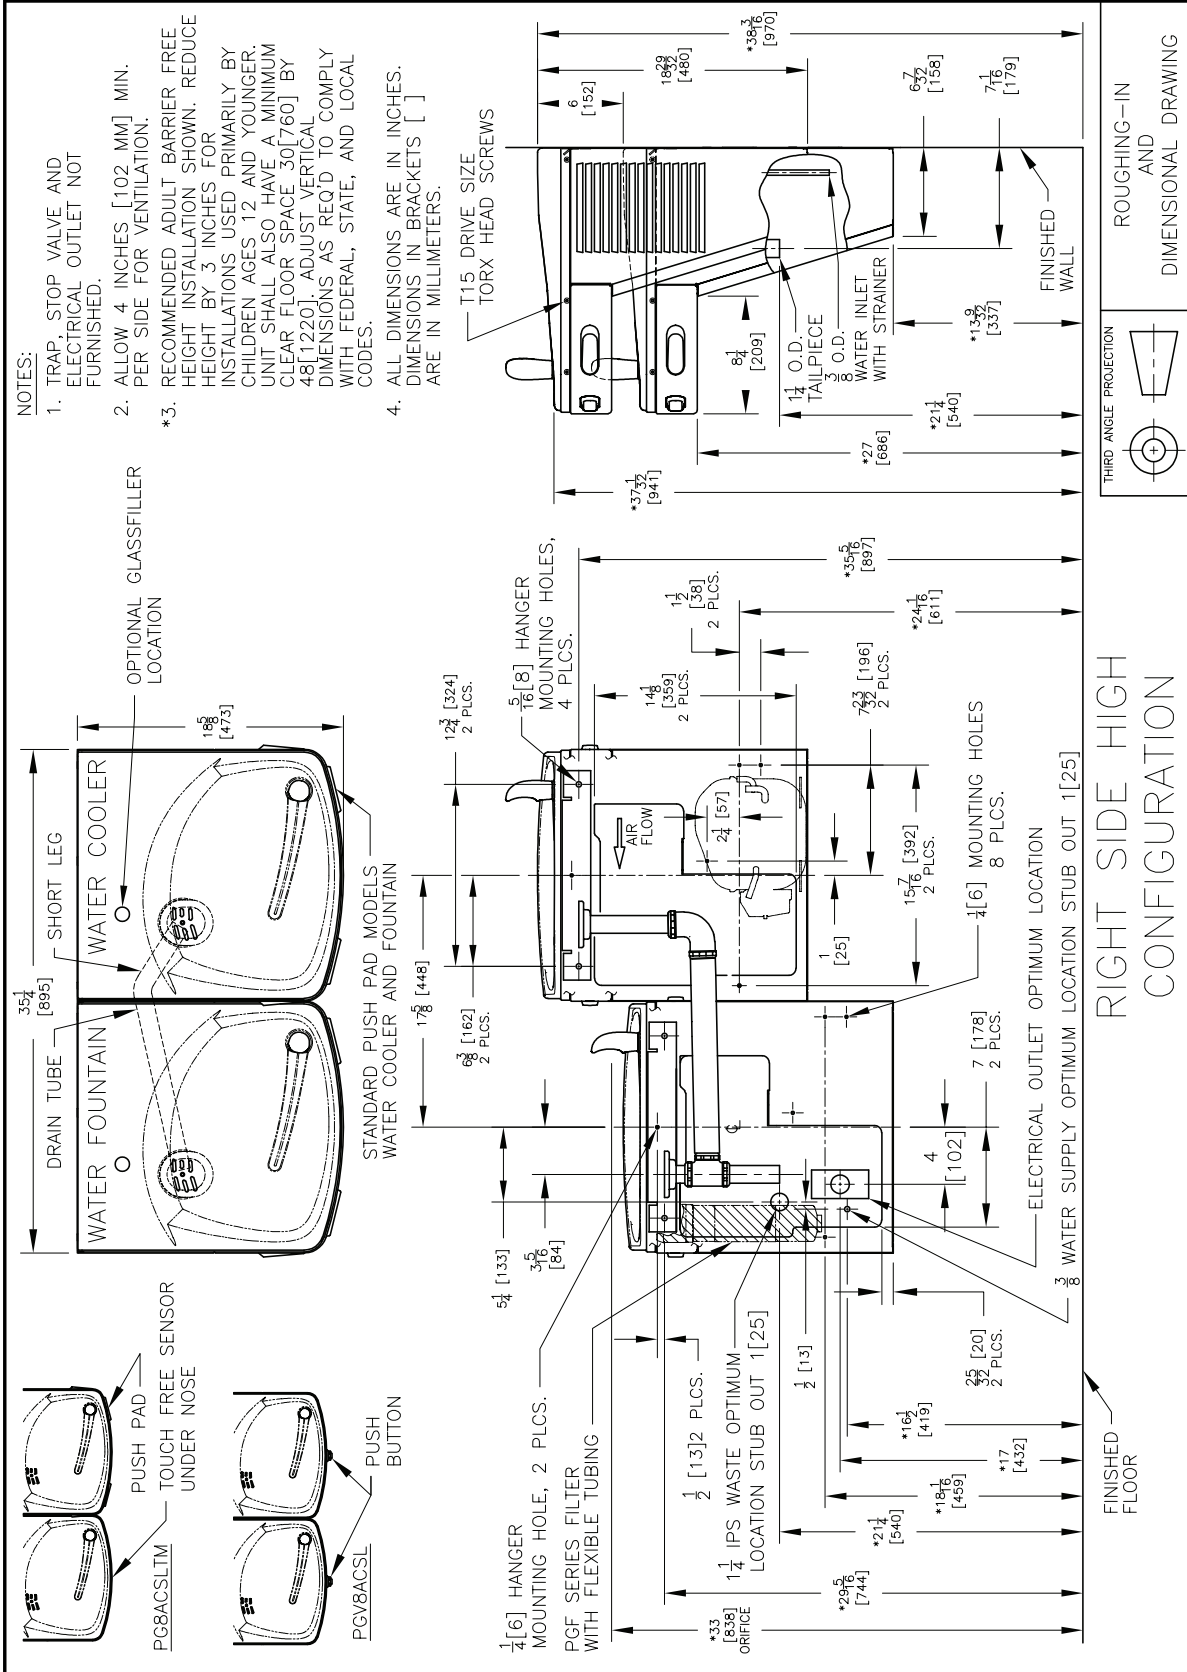

WATER INLET: DN15 MALE BSP CONNECTION. 1/2" BSP FEMALE FITTING ALSO INCLUDED.
 WASTE: DN40 SOCKET OUTLET. FLEXIBLE COUPLING. NEEDS TRAP FITTED.
 POWER: 3 PIN POWER CABLE PROVIDED TO BE CONNECTED TO RCD PROTECTED CIRCUIT