

WALL-RECESSED HYDRATION STATION

Wall-recessed mains-connected combination unit

Wall-recessed hydration stations include a bottle filler, and a vandal-resistant push button mechanism for using the bubbler.



KEY FEATURES

- Hydration Station Combo - Mechanically activated drinking fountain with contactless bottle filler (AC-M8WREBFY-ASM) or manual bottle filler (AC-M8WRSBFY-ASM)
- Vandal resistant mechanical push button bubbler/drinking fountain
- High efficiency cooling system and refrigerant R-134a
- Stainless steel top and heavy duty steel frame
- Built-in 100 micron strainer stops particles before they enter the waterway
- Waterways are lead free in materials and construction
- Built-in panel locks for easy access to chiller and filtration
- Large alcove to fit most sports bottles
- Built in drain - no drip tray to empty

Activated by a vandal-resistant mechanical push button, the basin is designed to eliminate splashing and standing water. The built-in, electronic, recessed bottle filler contains a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surface from discolouration, odours, and degradation. Optional filtration for taste, odour, and chlorine reduction is also available. The cooling system uses the highly efficient R-134a refrigerant.

All Oasis bottle fillers are made with proprietary Freshield technology. Freshield harnesses the natural bacteria-fighting power of silver by infusing it into a poly compound on moulded parts of the alcoves.



Model Information


	AC-M8WREBFY-ASM	AC-M8WRSBFY-ASM
Activation	Bottle Filler - Contactless, Infrared Sensor Drinking Fountain - Manual, Push Button	Bottle Filler - Manual, Push Button Drinking Fountain - Manual, Push Button
Sensor Coverage	Up to 5cm (approx.)	n/a
Filtration	Filter (optional), Built-in 100 micron strainer	
Exterior	Antimicrobial ABS Plastic, Brushed Stainless Steel	
Chassis	Heavy Duty Galvanised Steel	
Dimensions	1143(H) x 502(W) x 483(D) (287 recessed)	
Alcove Height	265mm	
Net Weight	64kg	
Power Supply	220-240V, 50/60 Hz	
Cooling Performance	30 LPH - Rated Capacity & Base Rate - (10°C in 21°C amb. temp.)	
Full Load Amps	2.2 A	
Rated Watts	347 W	
Country of Origin	Mexico	
Certifications	WaterMark, ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS)	
Warranty	1 Year Full, 2 Years Parts Only	

Your Partner in Cool.


**AQUA
COOLER**

AC-M8WREBFY-ASM


AC-M8WRSBFY-ASM

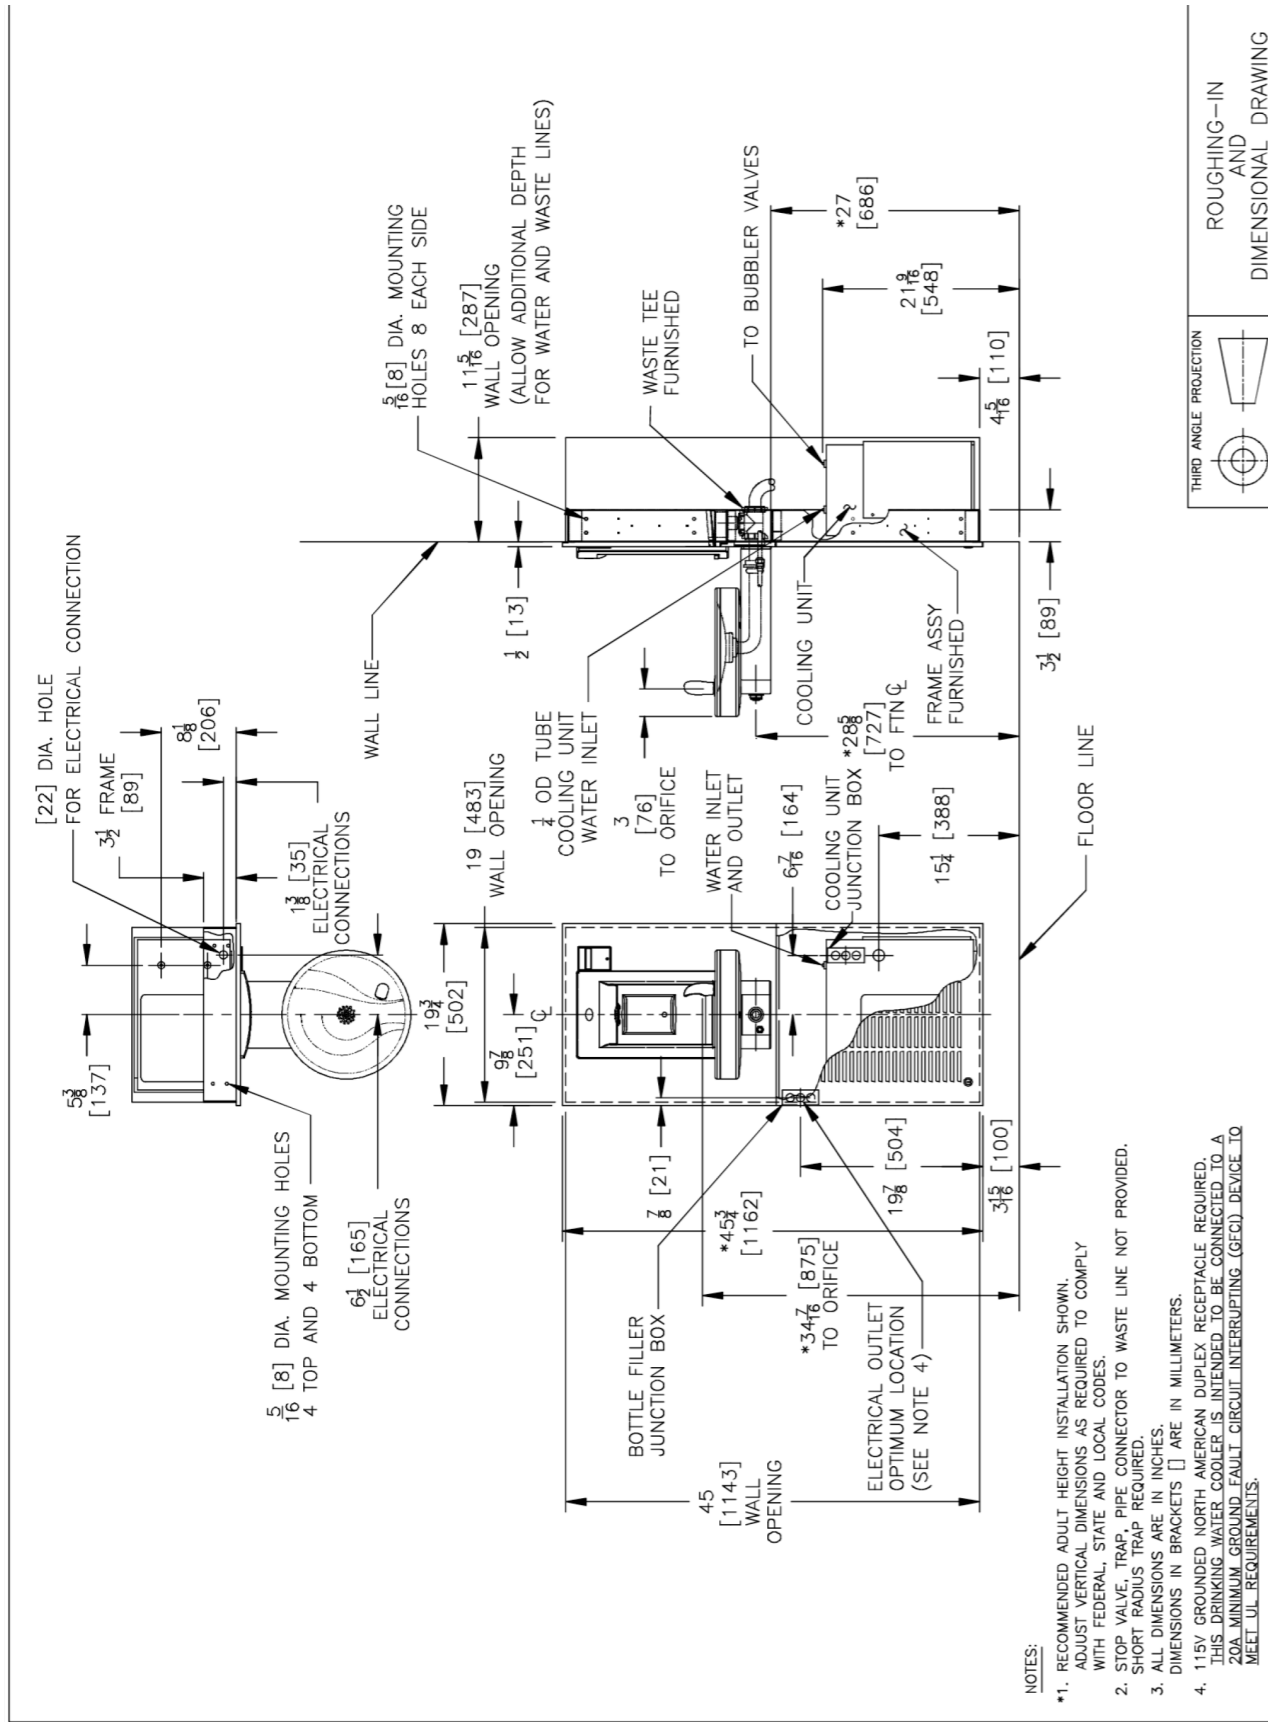

THIRD ANGLE PROJECTION
ROUGHING-IN
AND
DIMENSIONAL DRAWING

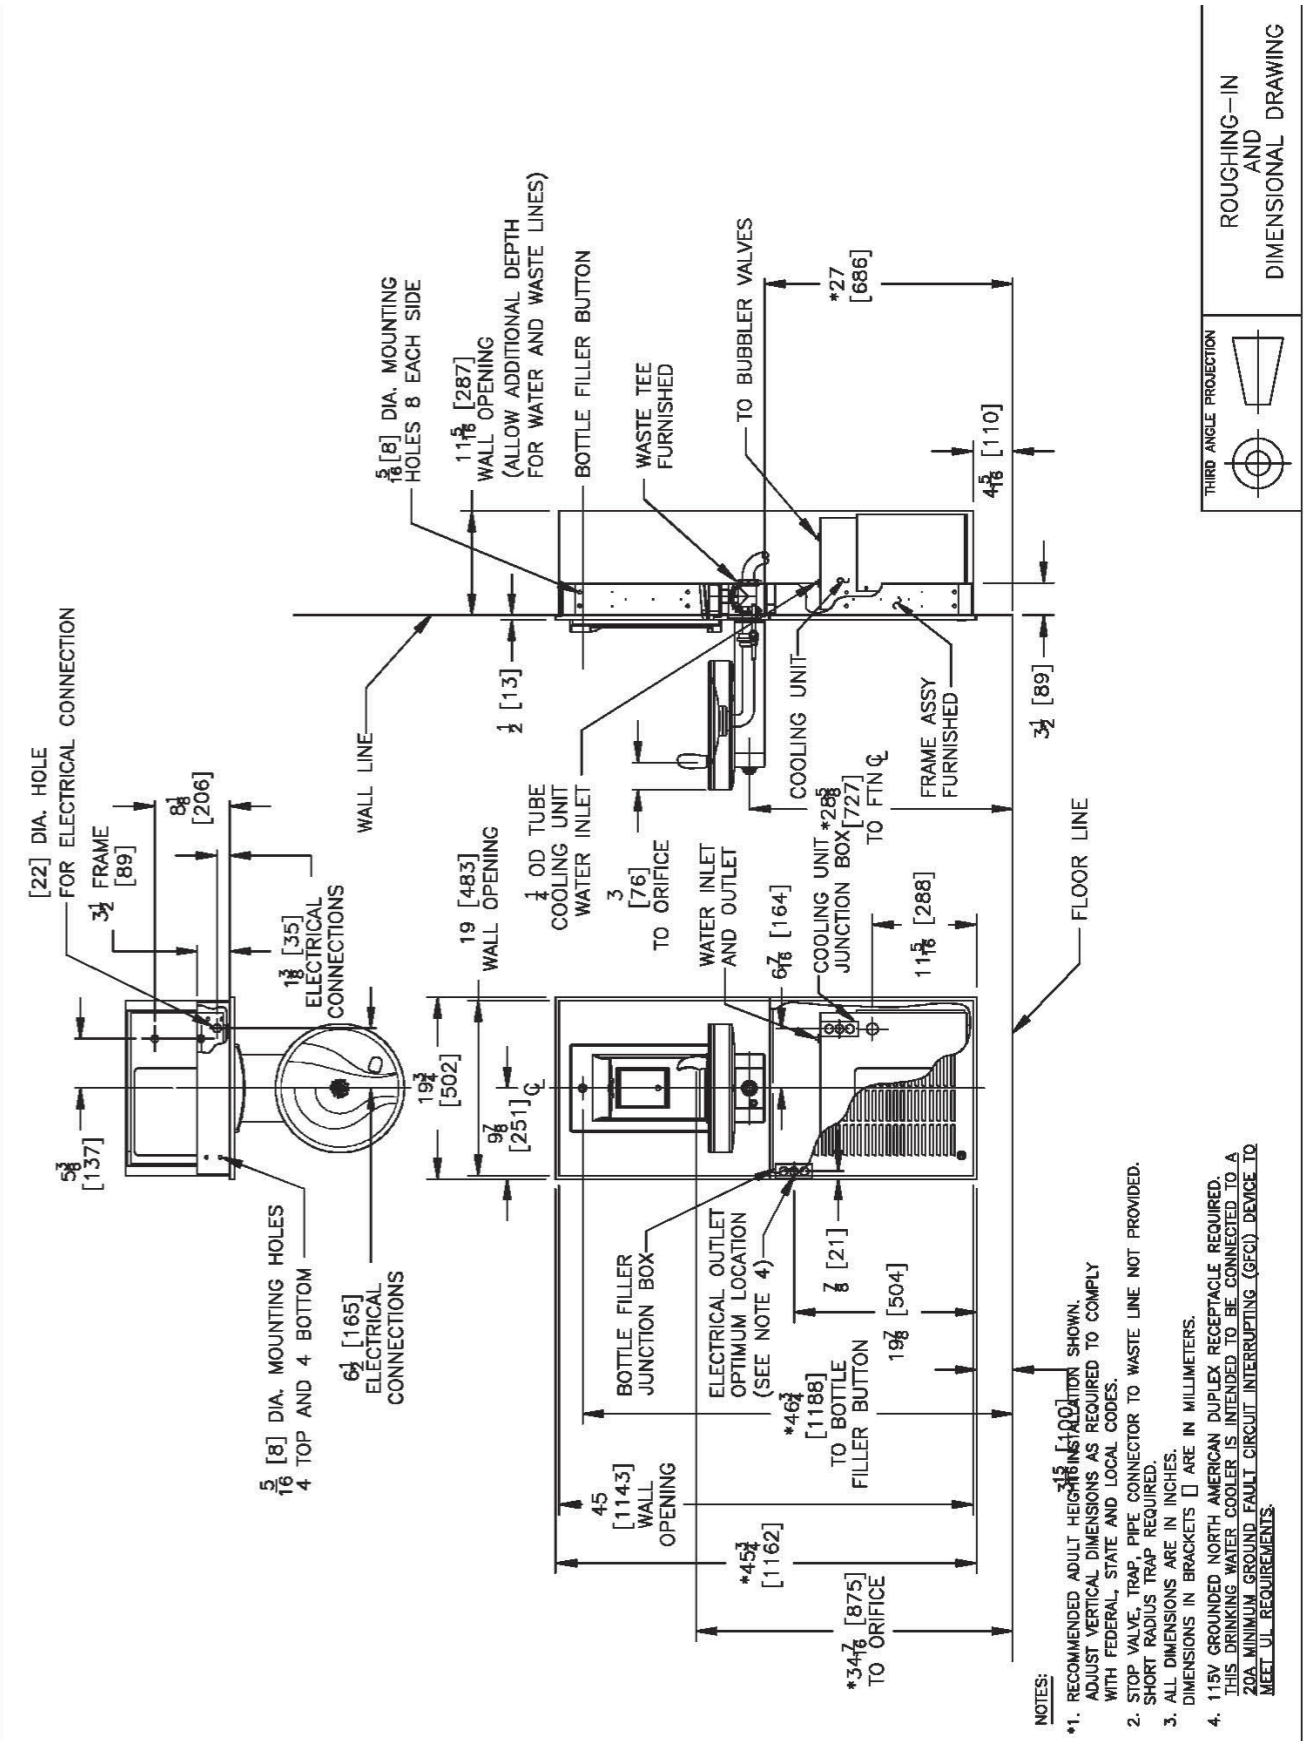

THIRD ANGLE PROJECTION
ROUGHING-IN
AND
DIMENSIONAL DRAWING

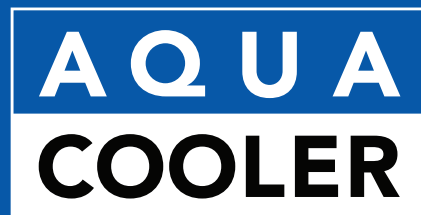

Your Partner in Cool.