

HYDRATION STATION RANGE

Wall-Recessed Hydration Stations

Models: AC-M8WREBFY Manual and Contactless, Refrigerated

AC-M8WREBFY

Delivering 60LPH of 10°C water at 21°C ambient.
Cooling system uses R-134a refrigerant.

This surface mount hydration station combo has two activation methods. The bottle filler includes an electronic sensor for a contactless (touch free) activation and a 30 second shut off timer. The radii drinking fountain is activated via vandal-resistant push-button.

The Bottle Counter conveniently displays the number of times the unit has been used, encouraging the refill of sports bottles.

Key moulded components shall contain Freshield, which utilises a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discolouration, odours and degradation.


Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.



Model Code	AC-M8WREBFY
Activation	Bottle Filler: Contactless (Infrared sensor) Drinking Fountain: Manual (Push-button)
Sensor Coverage	Up to 5cm (approx.)
Filtration	Filter (optional), Built-in 100 micron strainer
Disinfection	Available with Quasar UVC-LED (Model: AC-M8WREBFQY)
Auto-Off Water Flow	Bottle Filler: Yes ; Drinking Fountain: No
Water Connections	Inlet: 1/2" BSP connector, Drain: 40mm Female Socket (Not trapped)
Exterior	Antimicrobial ABS Plastic, Brushed Stainless Steel
Chassis	Heavy Duty Galvanised Steel
Dimensions	1143(H) x 502(W) x 483(D) (287 recessed)
Alcove Height	265 mm
Net Weight	64 kg
Power Supply	220-240V, 50/60 Hz
Cooling Performance	60 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)
Full Load Amps	2.2A
Rated Watts	347 W
Energy System	Refrigeration is on only when in use or if water temp increases during long period of standby.
Country of Origin	Mexico
Certifications	WaterMark, ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS)
Warranty	1 Year Full, 2 Years Parts Only

Your Partner in Cool.

AQUA
COOLER

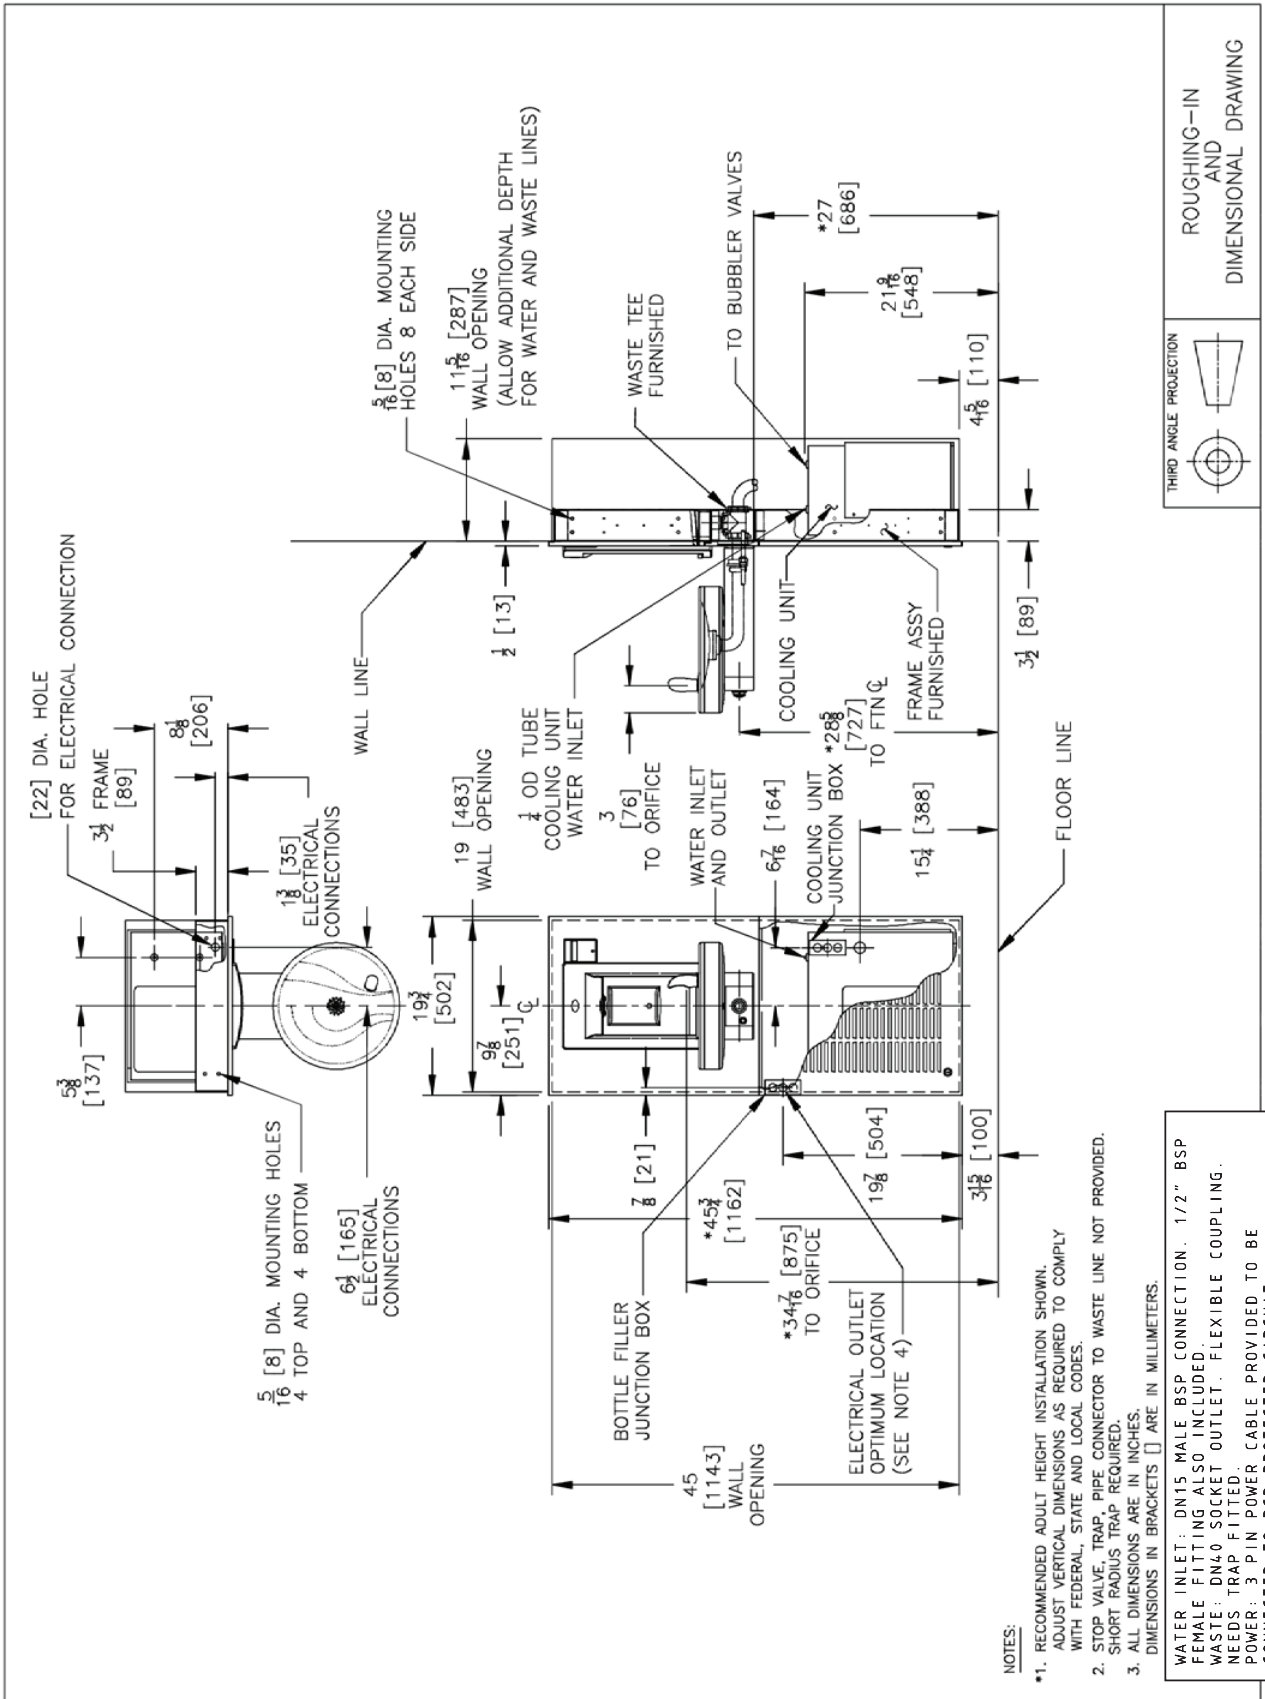

THIRD ANGLE PROJECTION

ROUGHING-IN AND DIMENSIONAL DRAWING